


# PROTAPE® TPE 326 Memory

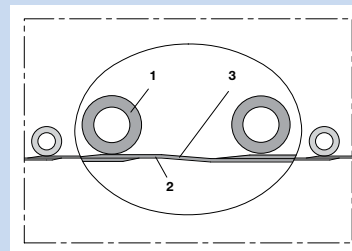

Exhaust gas hose; Crush resistant, light  
(exhaust gas temperatures up to 200°C\*)

## Applications

- for suction of engine exhaust gas
- for hose reel
- for slotted floor channels
- for above and below floor suction extraction

## Properties

- vibration resistant
- crush resistant
- highly flexible + compressible
- protected, flow-optimizing exterior folds
- fabric reinforced
- good resistance to chemicals

- small bending radiuses
- gas and liquid tight
- light weight
- conform to RoHS guideline

## Temperature Range

- exhaust gas temperatures to 200°C \*
- \* when correctly applied with exhaust gas funnels and sufficient fresh air supply (50% approx.).

## Design, Material

PROTAPE® tape hose

1. special plastic-profile supporting spiral
2. fabric-reinforced tape; wall: EPDM/ PP coated fabric
3. wall thickness 0,4 mm approx.

## Delivery variants

- further diameters and lengths available on request
- black (standard)
- special colours: coloured spiral
- customer-specific product marking

I.D. in / mm	O.D. mm	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Further Production Lengths m	Order No.
2 / 50-51	68	0,400	56,5	0,420	10 15	-	326-0051-0000
2,5 / 63-65	80	0,280	69,5	0,510	10 15	-	326-0063-0000
3 / 75-76	93	0,170	73,0	0,610	5 10 15	6 7,5 12,5	326-0076-0000
- / 80	97	0,130	76,0	0,640	-	5 6 7,5 10 12,5 15	326-0080-0000
4 / 100-102	119	0,050	71,0	0,800	5 10 15	6 7,5 12,5	326-0102-0000
5 / 125-127	144	0,035	88,5	0,980	5 10 15	6 7,5 12,5	326-0127-0000
6 / 150-152	169	0,030	106,0	1,160	5 10 15	6 7,5 12,5	326-0152-0000
8 / 200-203	220	0,010	142,5	1,520	5 10 15	6 7,5 12,5	326-0203-0000

## Accessories



CLAMP 212



CLAMP 217



CLAMP 213



CONNECT 270-271

I.D. in / mm	O.D. mm	Over- pressure bar	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Further Production Lengths m	Order No.
6,3 / 160	167	0,415	0,065	104,0	1,500	10	15	350-0160-0000
6,5 / 165	172	0,400	0,060	106,0	1,540	-	10 15	350-0165-0000
- / 170	177	0,390	0,060	108,0	1,580	10	15	350-0170-0000
- / 175	182	0,355	0,050	112,5	1,630	10	15	350-0175-0000
7 / 178-180	187	0,350	0,050	116,0	1,670	10	15	350-0180-0000
8 / 200-203	207	0,315	0,050	128,0	1,860	10 15	-	350-0200-0000
- / 225	232	0,265	0,035	142,5	2,080	10	15	350-0225-0000
9 / 228-229	240	0,249	0,030	148,0	2,120	-	10 15	350-0228-0000
- / 250	257	0,240	0,020	158,0	2,310	10	15	350-0250-0000
10 / 254	261	0,236	0,020	160,0	2,350	10	15	350-0254-0000
- / 275	282	0,220	0,020	172,5	2,540	10	-	350-0275-0000
11 / 280	287	0,210	0,020	176,0	2,590	10	-	350-0280-0000
- / 300	307	0,200	0,020	188,0	2,770	10	-	350-0300-0000
12 / 305	312	0,196	0,018	190,5	2,810	10	-	350-0305-0000
- / 315	322	0,190	0,015	196,5	2,900	-	10	350-0315-0000
- / 325	332	0,185	0,015	202,5	2,990	-	10	350-0325-0000
13 / 330	337	0,183	0,015	205,5	3,040	-	10	350-0330-0000
- / 350	357	0,170	0,015	218,0	3,220	10	-	350-0350-0000
14 / 356	363	0,167	0,010	222,0	3,340	10	-	350-0356-0000
- / 400	407	0,150	0,010	248,0	4,170	10	-	350-0400-0000
16 / 405-406	413	0,148	0,010	253,0	4,230	-	10	350-0406-0000
- / 450	457	0,135	0,010	281,0	4,690	10	-	350-0450-0000
18 / 457	464	0,132	0,010	285,5	4,760	-	10	350-0457-0000
- / 500	507	0,120	0,010	313,0	5,200	10	-	350-0500-0000
20 / 508	515	0,117	0,010	318,0	5,280	-	10	350-0508-0000

## Accessories



CLAMP 212



CLAMP 217



CLAMP 213



CONNECT 223



CONNECT 270-271

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. Additional technical data at [www.norres.com](http://www.norres.com). The right to make technical modifications is reserved. All values determined at 20°C and are approx. data.